


Datasheet for article

ArtNr.: 4554-040140

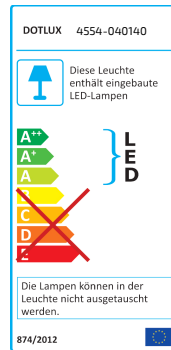

4

Dimension length in mm: 1272
Dimension width in mm: 145
Dimension height in mm: 111
: eckig
Energy consumption in W: 35-51
: 5150
Energy consumption kWh/1000h: 35-51

Beam angle: 140°
Color temperature in Kelvin: 4000
Color-rendering-index: CRI > 82
Cover material: polycarbonate
Dimmable: not dimmable
ENABLED licensed product: Yes
Energy efficiency: A++
Fire protection: yes
For Ex-zone dust: Ex II 3D Ex tc IIIC T85°C Dc IP66
For Ex-zone gas: Ex II 3G Ex ec IIC T6 Gc
Housing colour: gray
Housing material: Polycarbonate
IK protection: IK10
Input voltage: 176-240V AC/DC
IP- Protection: IP66
L/B value: L80/B20
Lifetime: approx. 50.000 h at 25°C
Output lm/W: 121
Power- factor: 0,97
Protection class: I
Suited for emergency power: yes
Tc temperature in °C: 40
Temperature range: -25°C to +55°C
Warranty: 5 years
Weight: 3.00 kg